Sojourn





NeckFlex Pillow



Water Feature





Foot Jets



Escutcheons



Specifications

Dimensions 84" W x 84" H x 36" H

Seating 7

Jets 42 jets

Electrical 240V, 40A

NeckFlex Jet Pillows 1

Water Management ClearZone (optional)

Full-Foam Insulation Standard

Shadow FX Optional

Stereo Optional








General		
Shape	Square	
Seating Capacity	7	0 -
Shell Material	Granitex™ / Acrylic	****
Dimensions	83" x 83" x 36" H / (211cm x 211cm x 91cm H)	
Corner Radii	9" (23cm)	
Water Capacity	340 Gallons (1059 Liters)	
Dry Weight	735 lbs (333 kg)	
Shipping Weight	735 lbs (356 kg)	5
Full Weight	3067 lbs (1391 kg)	
Skirt Material	Synthetic	000
Poly Floor	Yes	00
Water System	165	0
	7/2	Guine
Water Treatment System		1
Plumbing Systems	1 / 75 sq. ft.	1
Filters/Coverage		ł
Gate Valves	0	ł
Power Storm - Massage	2	ł
Power Storm - Roto	2	ł
Power Storm - Twirl	1	ł
Mini Storm - Directional	6	ł
Mini Storm - Rifled	4	
Mini Storm - Roto	4	ł
Mini Storm - Storm II	1	4
Cluster Storm - Directional	14	ł
Cluster Storm - Rifled	6	ł
VCR Jet® Mini Directional in NFJ	2	ł
Typhoon Jet	0	ł
Ozone Jet	1	ł
Heater Return Jet	0	ł
Pump Returns	4	ł
Diverter Valve	1	4
Floor Drain	No On Maria	4
Skimmer	8" Weir	
Special Feature	. / .	•
Dynamic Massage Sequencer w/ Control Panel	n/a	ł
NeckFlex® Jet Pillows	1	4
Headrest Pillow	3	4
Stereo System	Optional	4
Water Feature	Yes	4
Water Feature Volume Control	Yes	4
Cup Holder	7	1
Tactile Therapy	n/a	
Pump Information	Domestic (60Hz)	Export (50Hz)
Motor Size – Peak (Continuous) HP	3.6 (2.0) HP	3.6 (2.0) HP
Jet Pumps # of Pumps/Speed	One Dual & One Single	One Dual & One Single
Circulation Pump	No	No
Fountain Pump	No	No
Electrical System	Domestic (60Hz)	Export (50Hz)
Voltage	240	240
Amperage	30/40	1x16 / 2x16 / 1x32
Heater	4.0 KW	2.0 KW
Thermostat	Electronic	Electronic
Light	Multi Color LED	Multi Color LED
Control System	SSPA-1-D13	SSPA-1-D13-CE
Upper Control	Programmable Digital	Programmable Digital
Auxiliary Upper Control	No	No

Note: 1. Subject to change without notice.

Sojourn Specifications **Dimension One Spas**

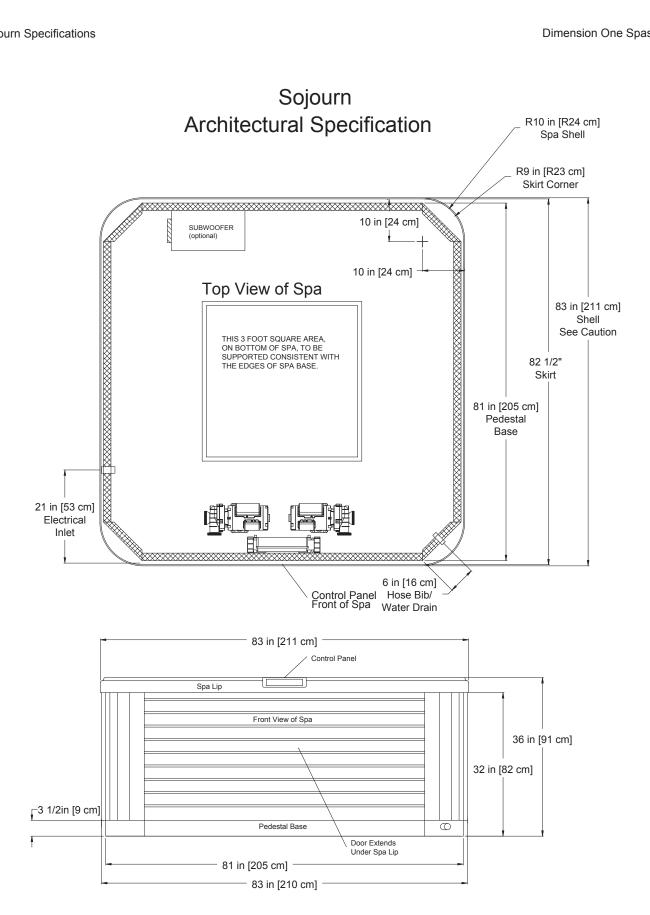

Note: 1. Subject to change without notice.

Engineering specs may differ slightly from brochure.
 For E-Z lifter installation allow 18" (45.7cm) clearance on the backside of the spa.
 Alternative cabinets may add significant weight. Ask your dealer for exact details.

Caution:
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.